

PRO SERIES



FR1500-ID

Slave Fingerprint reader

FR1500-ID is a stylish single-gang flush-mounted slave fingerprint reader for inBio and inBio Pro panels, only.

FR1500-ID features



Sleek Stylish Form Factor:

Flush-mounted stainless steel enclosure with slim and attractive design is ideal for both indoor & outdoor installations where aesthetics are very important.



Communication:

FR1500-ID connects only via RS485 to InBio & InBioPro panels. FR1500-ID does not support Wiegand.



Easy Operation:


Once a user places their finger on the FR1500-ID their fingerprint is subsequently matched by the InBio (or InBioPro) panel. FR1500-ID also provides Visual indication for acceptance/rejection of the fingerprint (and/or prox card) of the users.




Standard Reader:

- SilkID fingerprint sensor
- Built-in ZKAccess prox card reader
- Options for HID and Mifare card readers

Dimensions

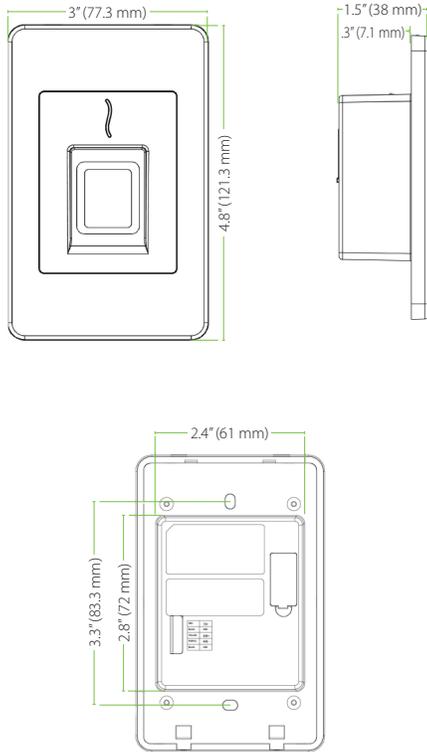

Installation with InBio (or InBioPro) panel

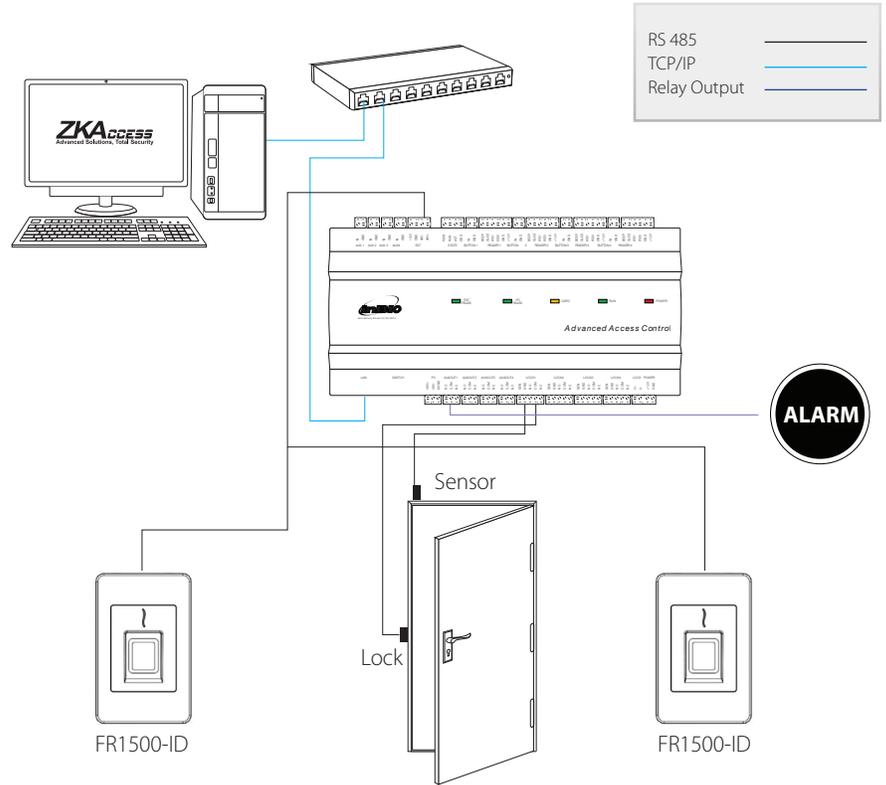

Specification

Communication

RS485 only to InBio & InBioPro panels

Power:

12V DC, 1A

Environment:

Operating Temp: 14° to 113° F (-10° to 45° C)

Operating Humidity: 20% to 80%

IP Rating: IP65

Optional Card Reader:

Mifare Card, HID 125 kHz card, HID iClass card

Dimensions

Length: 4.8 inches (121.3 mm)

Width: 3 inches (77.3 mm)

Depth: .3 inches (7.1 mm) exposed
1.5 inches (38 mm) behind wall

Part Numbers

FR1500-ID: with ZKAccess ID card reader

FR1500-Mifare: with Mifare card reader

FR1500-HID: with HID 125 kHz card reader

FR1500-iClass: with HID iClass card reader

****For single-gang installations be sure to additionally order a ZKAccess single-gang adapter**