


PRODUCT DATA SHEET

Wireless red resettable manual call point - Sagittarius line - EN54-11/25

Last edit: August 26, 2022

Code: **9137205** - Item: **SGCP200**

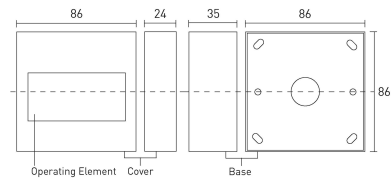

Wireless manual call point is a fully intelligent wireless device compatible with all translator and expander modules. The unit has a resettable plastic element. EN54-11 and EN54-25

FEATURES AND ADVANTAGES

- Third party certified
- Bi-directional wireless communication
- Resettable
- High visibility of the alarm condition through LED indication
- Resettable key
- Utilises standard low cost lithium battery technology
- 5 years battery life
- High reliability

TECHNICAL SPECIFICATIONS

Operating Temperature range: from -10°C to +55°C
Max Humidity (non condensing): 95% RH
Dimensions: 86 x 86 x 59 mm
IP rating: IP 42
Radio signal modulation type: FSK
Radio channels: 7
Communication distance: 150 mt in campo aperto
Weight (without batteries): 186 gr.
Primary battery: 2 Ah), CR123A (3V & 1
Secondary battery: 24 Ah), CR2032A (3V & 0
Primary battery lifetime (typical): 5 anni
Secondary battery lifetime (typical): 2 mesi

CERTIFICATIONS / APPROVALS



EN 54-11: Manual call point
EN 54-25 Components using radio links

